


Wetland Buffer Sign Specifications

Placement

For portions of a parcel *subject to wetland buffer rule*, a sign must be placed at minimum:

- at **every lot line** crossing buffer boundary,
- at **major deflection points** in buffer boundary, and
- at least **every 200 feet** along buffer boundary.

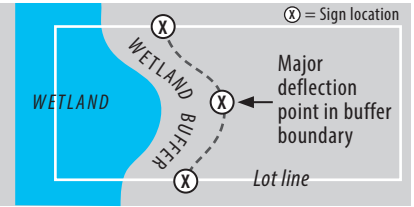

8.25 inches

DO NOT DISTURB

WETLAND
BUFFER

**NO MOWING, NO SPRAYING, &
NO DUMPING BEYOND THIS POINT**

This buffer of vegetation
protects water quality
for people and wildlife.

Learn more



RILEY
PURGATORY
BLUFF CREEK
WATERSHED DISTRICT

rpbcwd.org

Mounting holes

Diameter:
0.375-inch

Location:
One on top and bottom.
Center each hole
0.5-inch from
edge of sign.

Diameter and location of holes may be adjusted to accommodate alignment with post holes as long as text is not removed or covered by mounting bolts.

Material

Substrate:
Aluminum *at least*
0.08 inch thick.

Graphic:
Durable, exterior-
grade material
that is waterproof
and fade-
resistant.

**Up to 1-inch
radius on all
four corners.**

5.75 inches